

## **FRONT DOOR REPLACEMENT**

**The front door must be replaced with a 'like' product. Currently, there are not 'off the shelf' doors available with the raised panels that the original door has. If you replace your door, it is acceptable to replace with a door with recessed panels.**

**The specifications we provide are for 'off the shelf' doors available at both Home Depot and Lowe's. You must know if you have a 'left hand' or 'right hand' door before you purchase.**

**Doors are available both as 'door slab only' and 'prehung', which includes the frame, hinges, etc.**

**Additionally, doors are available in steel or fiberglass**

**The samples attached are for 'Prehung' doors.**

**\*\*\*You must paint your door and the recessed panel border to match the paint and trim specifications found separately in the guidelines.**

**The Board of Directors does not recommend any one door over the other, these are examples of what would be a 'like' replacement option.**



More saving.  
More doing.

Your Store **Celebration Station #4614**  
Use [Current Location](#) or [find store](#)

Masonite Model # 27105 Internet # 100053184 Store SKU # 826296

## 36 in. x 80 in. Premium 6-Panel Primed Steel Prehung Front Door with Brickmold

★★★★★ (7) [Write a Review](#) [Questions & Answers \(2\)](#)



[Open Expanded View](#)

[Click Image to Zoom](#)

**\$159.00** /each

IN STOCK AT YOUR SELECTED STORE

**Celebration Station #4614**  
Virginia Beach, VA 23452

6 In Stock  
Aisle 24, Bay 018

### PRODUCT OVERVIEW Model # 27105 Internet # 100053184 Store SKU # 826296 Store SO SKU # 443058

By combining the strength of steel and the elegance of high-definition panels, you will enjoy the ultimate in security and beauty with the Masonite 6 Panel Primed Steel Entry Door with No Brickmold. High-definition panels closely replicate the appearance of a high-end wood door with excellent shadow lines for added architectural interest. Expertly engineered, the wood-edge design features an energy saving door core adding strength and insulation. Ready to customize and paint, the baked-on primer helps create a durable, smooth finish.

California residents: see [Proposition 65 information](#)

- High-quality steel provides strength and security
- Wood-edge engineered interlocking design with grooved stiles for added strength and structural rigidity
- High performance compression weather-stripping helps to seal out drafts
- Smooth, primed white surface ready for painting and decorating
- Steel security plate in the frame helps to resist forced entry
- Reinforced lock area provides strength and security for door hardware
- Entry door comes fully assembled with hinges, frame, aluminum sill and weather stripping
- Rot-resistant bottom rail made of high-performance composite materials
- Exterior door slab is double bored for lockset - sold separately
- From outside, opens toward the inside of the home with the hinges on the right
- Note: Product may vary by store

### SPECIFICATIONS

#### DIMENSIONS

Assembled Depth (in.)	4.5625 in	Door Thickness (in.)	1.75 in
Assembled Height (in.)	81.5 in	Jamb Size (in.)	4-9/16"

Assembled Width (in.)	37.5 in	Rough Opening Height	82 in
Door Size (WxH) in.	36 x 80	Rough Opening Width	38.25 in

**DETAILS**

Color Family	White	Finish Type	Primed
Color/Finish	Primed White	Hinge Finish	Nickel
Commercial	No	Included	No additional items or accessories included
Door Configuration	Single Door	Material	Steel
Door Handing	Right-Hand/Inswing	Number of Hinges	3
Door Style	Classic	Panel Type	6 Panel
Door Type	Exterior Prehung	Product Weight (lb.)	100 lb
Features	Brickmould,Lockset Bore,Weatherstripping	Returnable	60-Day

**WARRANTY / CERTIFICATIONS**

Energy Star Qualified	North-Central,Northern,South-Central,Southern	Manufacturer Warranty	Limited Lifetime Warranty
Fire rating	None		



More saving.  
More doing.™

Your Store: **Celebration Station #4614**  
Use Current Location or [find store](#)

Masonite Model # 48057 Internet # 100030516 Store SKU # 509717

## 36 in. x 80 in. 6-Panel Primed Smooth Fiberglass Prehung Front Door with Brickmold

★★★★☆ (6) [Write a Review](#) [Questions & Answers \(4\)](#)



**\$192.00** /each

IN STOCK AT YOUR SELECTED STORE

**Celebration Station #4614**  
Virginia Beach, VA 23452

4 In Stock  
Aisle 24, Bay 016

[Open Expanded View](#)

[Click Image to Zoom](#)



### PRODUCT OVERVIEW Model # 48057 Internet # 100030516 Store SKU # 509717 Store SO SKU # 480122

Bring the beautiful look of smooth wood and the performance of fiberglass to your home with the Masonite 6-Panel Primed Smooth Fiberglass Entry Door with Brickmold. Engineered to last a lifetime, these high-performance smooth surface doors feature high-definition profiles for added architectural interest. Ready for painting, the smooth surface is primed white and expertly engineered not to rust or dent. Designed with an energy saving polyurethane door core, the maintenance-free proprietary fiberglass construction provides maximum protection and durability. California residents: see [Proposition 65 information](#)▶

- Low-maintenance, high-performance fiberglass resists cracking, warping, splitting and denting
- High-definition panel profiles and true square-edge construction provide an authentic wood door appearance
- Engineered stiles provide excellent dimensional stability for harsh weather climates
- High performance compression weather-stripping helps to seal out drafts
- Smooth, primed surface ready for painting and decorating
- Reinforced lock block provides strength and security for door hardware
- Entry door comes fully assembled with hinges, frame, aluminum sill and weather stripping
- Fiberglass slab features an energy saving polyurethane core
- Exterior door slab is double bored for lockset - sold separately
- From outside, opens toward the inside of the home with the hinges on the left

## SPECIFICATIONS

### DIMENSIONS

Assembled Depth (in.)	4.5625 in	Finished Opening Height (in.)	81.5
Assembled Height (in.)	81.5 in	Finished Opening Width (in.)	37.5
Assembled Width (in.)	37.5 in	Jamb Size (in.)	4-9/16"
Door Size (WxH) in.	36 x 80	Rough Opening Height	82 in
Door Thickness (in.)	1.75 in	Rough Opening Width	38.25 in

**DETAILS**


Color Family	White	Finish Type	Primed
Color/Finish	Primed White	Hinge Finish	Nickel
Commercial	No	Included	No additional items or accessories included
Door Configuration	Single Door	Material	Fiberglass
Door Handing	Left-Hand/Inswing	Number of Hinges	3
Door Style	Classic	Panel Type	6 Panel
Door Type	Exterior Prehung	Product Weight (lb.)	100 lb
Features	Brickmould,Lockset Bore,Weatherstripping	Returnable	90-Day

**WARRANTY / CERTIFICATIONS**

Energy Star Qualified	North-Central,Northern,South-Central,Southern	Manufacturer Warranty	Limited Lifetime Warranty
Fire rating	None		

Your Store:  
Virginia Beach, VA

Your Store: Virginia Beach, VA

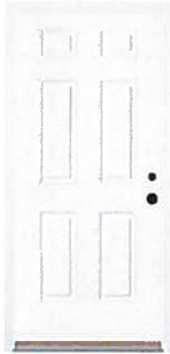

**Therma-Tru Benchmark Doors 6-Panel Left-Hand Inswing White Fiberglass Primed Prehung Entry Door (Common: 36-in x 80-in; Actual: 37.5-in x 81.5-in)**

Item # 228474 | Model # BMTTSFG1130LB



**\$199.00**



- Facebook
- Pinterest
- Twitter
- Google+
- Email

**FREE Store Pickup**

Your order can be available for pickup in **Lowe's Of Virginia Beach, VA** today.

**Lowe's Truck Delivery**

Your order will be ready for delivery to you from your selected store.

**Parcel Shipping**

**Unavailable for This Order**

Sent by carriers like UPS, FedEx, USPS, etc.

**Therma-Tru Benchmark Doors 6-Panel Left-Hand Inswing White Fiberglass Primed Prehung Entry Door (Common: 36-in x 80-in; Actual: 37.5-in x 81.5-in) \$199.00**

**Description**

6-Panel Left-Hand Inswing White Fiberglass Primed Prehung Entry Door (Common: 36-in x 80-in; Actual: 37.5-in x 81.5-in)

- See the beauty in fiberglass with deep embossed panels and a smooth paintable surface; an iconic American-style door, the traditional design complements a variety of home styles
- Fiberglass doors are low-maintenance and high-performance; unlike wood or steel doors, durable fiberglass is resistant to cracking, warping, splitting and denting
- A Therma-Tru Benchmark door is a complete door system including all necessary components; jambs, mouldings, weatherstrip, sill and hinges in complementing finish colors, all engineered to help ensure a precision fit for years of trouble-free performance
- Door system is ENERGY STAR® qualified with a polyurethane foam core - delivering exceptional energy efficiency
- Rot-Resistant jambs help prevent moisture and insect damage to door frames
- Security strike plate and 12 5-in solid wood lock block improves resistance against forced entry
- Draft and moisture-resistant, with an adjustable sill and foam-filled compression weatherstrip that remains flexible and helps seal the entryway against moisture and air infiltration
- Therma-Tru Benchmark fiberglass provides peace of mind with a lifetime limited warranty
- Ready-to-install door with frame

**Specifications**

Collection Name	N/A	Material	Fiberglass
Hinge Finish	Brass	Construction	Insulating core
Jamb Width (Inches)	4.5625	Door Handing	Left-hand inswing
Common Width (Inches)	36	Warranty	Limited lifetime
Common Height (Inches)	80	Glass Insulation	N/A
Privacy Rating	N/A		
Glass Caming	No		

Caring Finish	N/A	Glass Style	N/A
Brickmould Included	Yes	Wood Species	N/A
Weatherstripping Included	Yes	Impact Resistant	No
Lockset Bore	Ready for lockset and deadbolt	Works with Iris	No
		Slab or Prehung	Prehung
		Finish	Primed
Sill Type	Adjustable	Door Configuration	Single door
Sill Finish	Mill	Color/Finish Family	White
Common Size (W x H)	36-in x 80-in	Manufacturer Color/Finish	White
Actual Width (Inches)	37.5	ENERGY STAR Qualified North/Central Zone	Yes
Rough Opening Width (Inches)	38.25	ENERGY STAR Qualified Northern Zone	Yes
Door Style	6-panel	ENERGY STAR Qualified South/Central Zone	Yes
Actual Height (Inches)	81.5	ENERGY STAR Qualified Southern Zone	Yes
Rough Opening Height (Inches)	82	Lowe's Exclusive	Yes

© 2015 Lowe's. All rights reserved. Lowe's and the gable design are registered trademarks of LF, LLC